

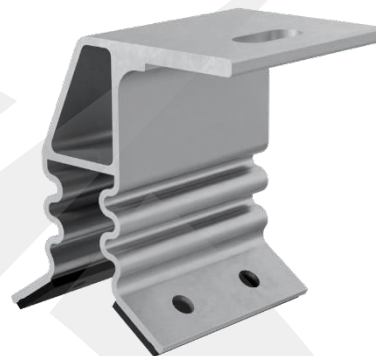


LM-CRL-F

The LMCRL-F is a short rail with EPDM for corrugated sheeting featuring pre punched M6 holes and a slotted flat top design to accommodate a top/bottom slotted rail.



Application	Full rail solutions Most popular corrugated roof sheets
Key Features	Flexible Leg Design adapts to small surface irregularities Compatible with Top/Bottom Rail, designed specifically for R42 Profile. EPDM Sealing provides a durable, water - resistant barrier. Angled Base Attachment Points enhanced pull out resistance.
Material	Aluminium 6005-T5 / 6063-T6, EPDM
Specifications	Tumbled / Mill Finish
Dimensions	H 72.8 mm x L55 mm x W74.3 mm
Total Weight	87.5 g
Orientation	Landscape& Portrait

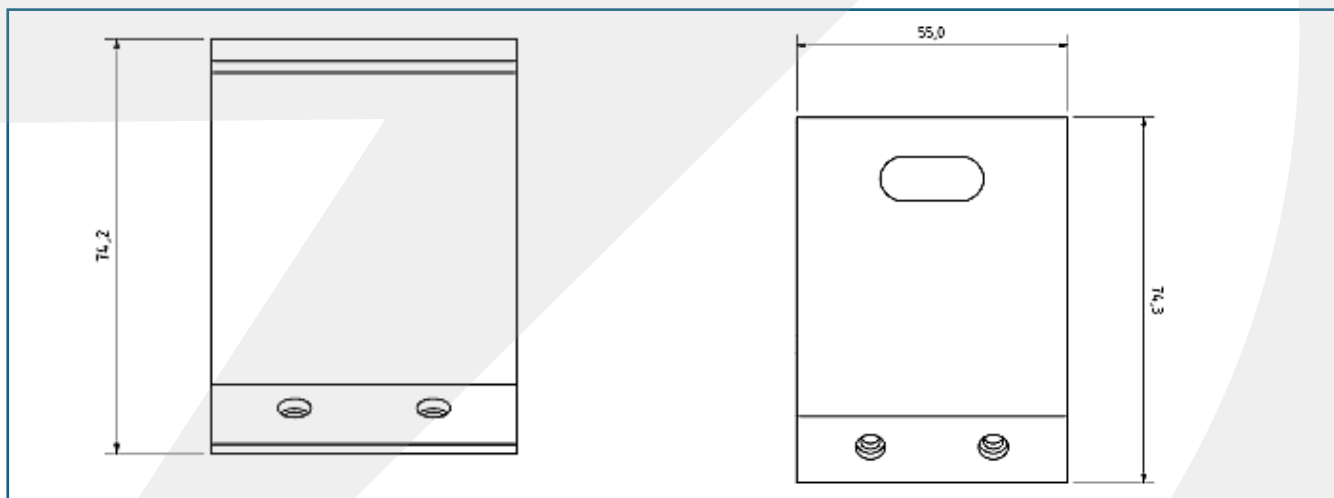

Leak- Preventative

The LMCRL-F features a leak-preventing EDPM layer where the screws are placed, offering enhanced protection against water ingress.



Easy Installation

The LMCRL-F features a versatile design compatible with most corrugated sheet profiles, providing a flexible mounting solution.