

Off-Grid Inverter


FSD-3~4.2K1P-BL
「3/3.6/4/4.2kW」



Features

- Parallel Connection**
Parallel connection with up to 9 units
- Enhanced Overload Capacity**
2 times the rated power for 5 seconds
- High-Power Module Compatibility**
Higher PV input current up to 18A
- Smart Load Management**
Dual AC outputs to power loads on demand priority
- Seamless Switchover**
UPS-level switching time $\leq 4\text{ms}$
- Efficient Battery Charge/Discharge**
Max. 120A charge current
Max. 137A discharge current
- Remote Monitoring**
Built-in WiFi module for HaiPower monitoring
- Stylish Design**
Larger screen with touch keys

Off-grid Solution

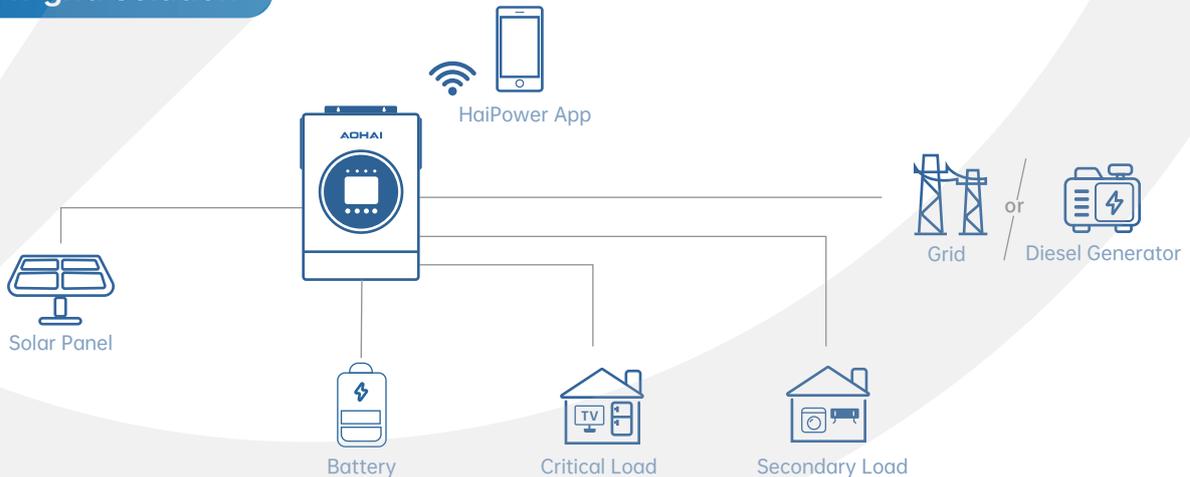

Specifications

Model	FSD-3K1P-BL	FSD-3.6K1P-BL	FSD-4K1P-BL	FSD-4.2K1P-BL
Solar Input Data				
Max. PV Input Power	3300W	3960W	4400W	5200W
Max. Input Voltage			500V	
Start-up Voltage			90V	
MPPT Voltage Range			60V~450V	
Max. Input Current per MPPT			18A	
Max. Short Circuit Current per MPPT			23A	
Number of MPPT			1	
Battery Data				
Battery Type	Li-Ion / Lead-acid			
Nominal Battery Voltage	24V			
Battery Voltage Range	20~30V			
Max. Discharge Current	137A			
Max. Charge / Discharge Power	3000W			3300W
Li-Ion Battery Activation	Yes			
Li-Ion Battery Communication	CAN / RS485			
Max. Solar Charge Current	120A			
Max. AC Charge Current	100A			
Max. Charge Current (PV+AC)	120A			
AC Input Data (Grid)				
Nominal Input Voltage	230Vac, L / N / PE			
Input Voltage Range	90~280V			
Max. Input Current	25A			
Nominal Input Power	5700W			
AC Frequency Range	50 / 60Hz (Auto sensing)			
Inverter Output Data				
Nominal Output Power	3000W	3600W with PV & battery 3000W with battery only	4000W with PV & battery 3300W with battery only	4200W with PV & battery 3300W with battery only
Peak Apparent AC Power	6000VA	7200VA	8000VA	8400VA
Nominal AC Voltage	230V			
Nominal Grid Frequency	50 / 60Hz			
Voltage Waveform	Pure Sine Wave			
Transfer Time (Typ)	4ms			
Nominal Output Current	13.1A	15.7A	17.4A	18.3A
Overload Protection	30s@102%-110% load; 10s@110%-130% load; 5s@130%-200% load			
THDv (@linear load)	<3%			
Efficiency				
Peak Efficiency	94%			
MPPT Efficiency	≥ 99.9%			
Protect				
DC Surge Protection	Yes			
AC Surge Protection	Yes			
AC Short Circuit Protection	Yes			
System Parameters				
Dimension (W*H*D)	290*424*120mm			
Weight	7.1kg			
Relative Humidity	5%~95% (Non-condensing)			
Operating Temperature Range	-10°C~60°C			
Noise Emission	≤ 50dB			
Altitude	2000m			
Cooling Method	Fan Cooling			
Ingress Protection	IP20			
Characteristic				
Number of AC Output	2			
Display	LCD & APP			
Communication Interface	RS485 / USB / CAN / Wi-Fi			
Parallel Capability	9			