

WWW.RESUNSO LAR.COM

## RS8 R-M TOPCON

**RS8I-M HALF-CELL** series is produced with high efficiency topcon multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spotcrisis caused by shadow effect.



### High Reliability

SMBB technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



### Anti-PID Resistance

Prominent anti-PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



### Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



### High Efficiency

SMBB technology can reduce the module internal power loss to improve the module conversion efficiency significantly.




### Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass,the module has stronger performance under low light circumstances.



### High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

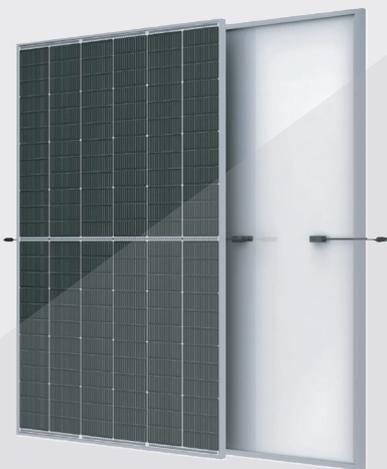

**144 Cells**

Mono TOPCON 210\*182mm,16/18BB

**425-460W**

Power Output


**23.02%**

The Highest Efficiency

**±3%**

Tolerance

**0.5% Annual Degradation over 30 years**

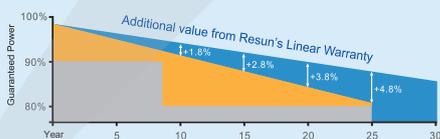

Resun's Standard  
Common module's Linear  
Industry Standard

### LINEAR PERFORMANCE WARRANTY

**15** Year Product Warranty

**30** Year Linear Power Warranty

## Full range of products and certification systems

ISO 9001/14001 TUV PID-FREE CE IEC 61215/61730/61701/62716




# RS 8R-M TOPCON



GLOBAL PROFESSIONAL PV PRODUCTS

INTEGRATED SOLUTIONS SUPPLIER

Dimension of PV Modules Unit: mm

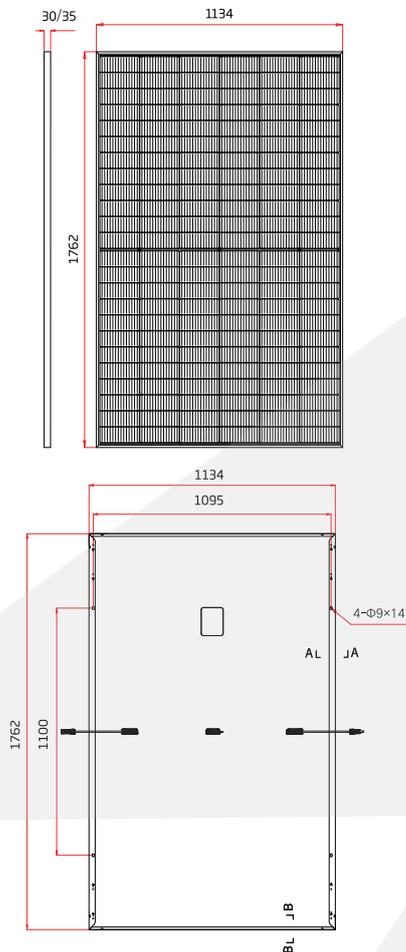

## ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	425	430	435	440	445	450	455	460
Open Circuit Voltage-Voc(V)	51.20	51.50	51.80	52.10	52.40	52.70	53.00	53.30
Short Circuit Current-Isc(A)	10.55	10.60	10.65	10.70	10.75	10.80	10.85	10.90
Maximum Power Voltage-Vmp(V)	43.11	43.40	43.68	43.97	44.25	44.53	44.80	45.07
Maximum Power Current-Imp(A)	9.86	9.91	9.96	10.01	10.06	10.11	10.16	10.21
Module Efficiency	21.27%	21.52%	21.77%	22.02%	22.27%	22.52%	22.77%	23.02%

STC: Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

## ELECTRICAL DATA(NOCT)

Maximum Power-Pmax(Wp)	323	327	331	334	338	342	346	350
Open Circuit Voltage-Voc(V)	47.97	48.26	48.54	48.82	49.10	49.38	49.66	49.94
Short Circuit Current-Isc(A)	8.52	8.56	8.61	8.65	8.69	8.73	8.77	8.81
Maximum Power Voltage-Vmp(V)	40.44	40.71	40.97	41.24	41.51	41.77	42.02	42.28
Maximum Power Current-Imp(A)	7.99	8.03	8.07	8.11	8.15	8.19	8.23	8.27

NOCT: Irradiance at 800 W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

## MECHANICAL DATA

Solar Cells	Mono-crystalline TOPCON 210*182mm, 16/18 Bus bars
Cell Configuration	144cells(6*22)
Module Dimensions	1762*1134*35/30mm
Weight	22.3/21.7kg
Front Cover	3.2mm Tempered Glass
J-Box	IP68, 3 Diodes
Cable	4mm <sup>2</sup> (IEC)/12AWG(UL),300mm+300mm, or customized length
Connectors	MC4 or MC4 Compatible
Standard Packaging	31/36pcs/pallet


## TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.045%/°C
Temperature Coefficient of Pmax	-0.30%/°C
Operational Temperature	-40~+85°C
Maximum System VoltageMax	1500V(IEC)/1500V(UL)
Series Fuse Rating	20A
Limiting Reverse Current	20A


## PACKAGING CONFIGURATION

	40 HQ
Number of modules per container	806/936 pcs
Package	31/36 pcs/pallet
Package Number	26 pallets
Package Weight	721/811 kg/pallet
Package Dimension	1790*1130*1270 mm/pallet

I-V CURVES OF PV MODULE(445 W)

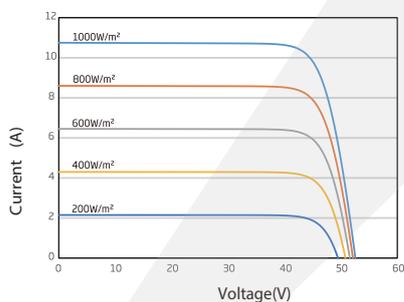

P-V CURVES OF PV MODULE(445W)

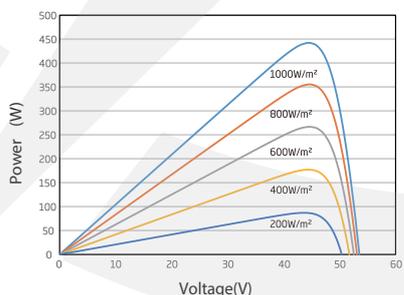

Add: No.99 Zhidong Road, Zhixi Town, Jintan District, Changzhou city, Jiangsu Province, China

E-mail: info@resunsolar.com

Web: www.resunsolar.com

PvPower

Address: Unit C, 16 Liebenberg street, Alrode, 1451 Tel: +27 10 449 9745  
www.pvpower.co.za

PvPOWER.CO.ZA  
Everything Solar

